


Assembly notes:

- The maximum distance between the centre line of each upright should be approximately 1510 mm.
- This measurement is based on the length of the top rail plus 10mm, allowing for expansion.
- The Bishop Hat bracket has a single set of top screw holes. These are designed to secure the material in place while still permitting movement at one end to accommodate thermal expansion.
- The gap at the top of the bracket is provided for inspection purposes.
- Use stainless steel pan head screws. Do not overtighten

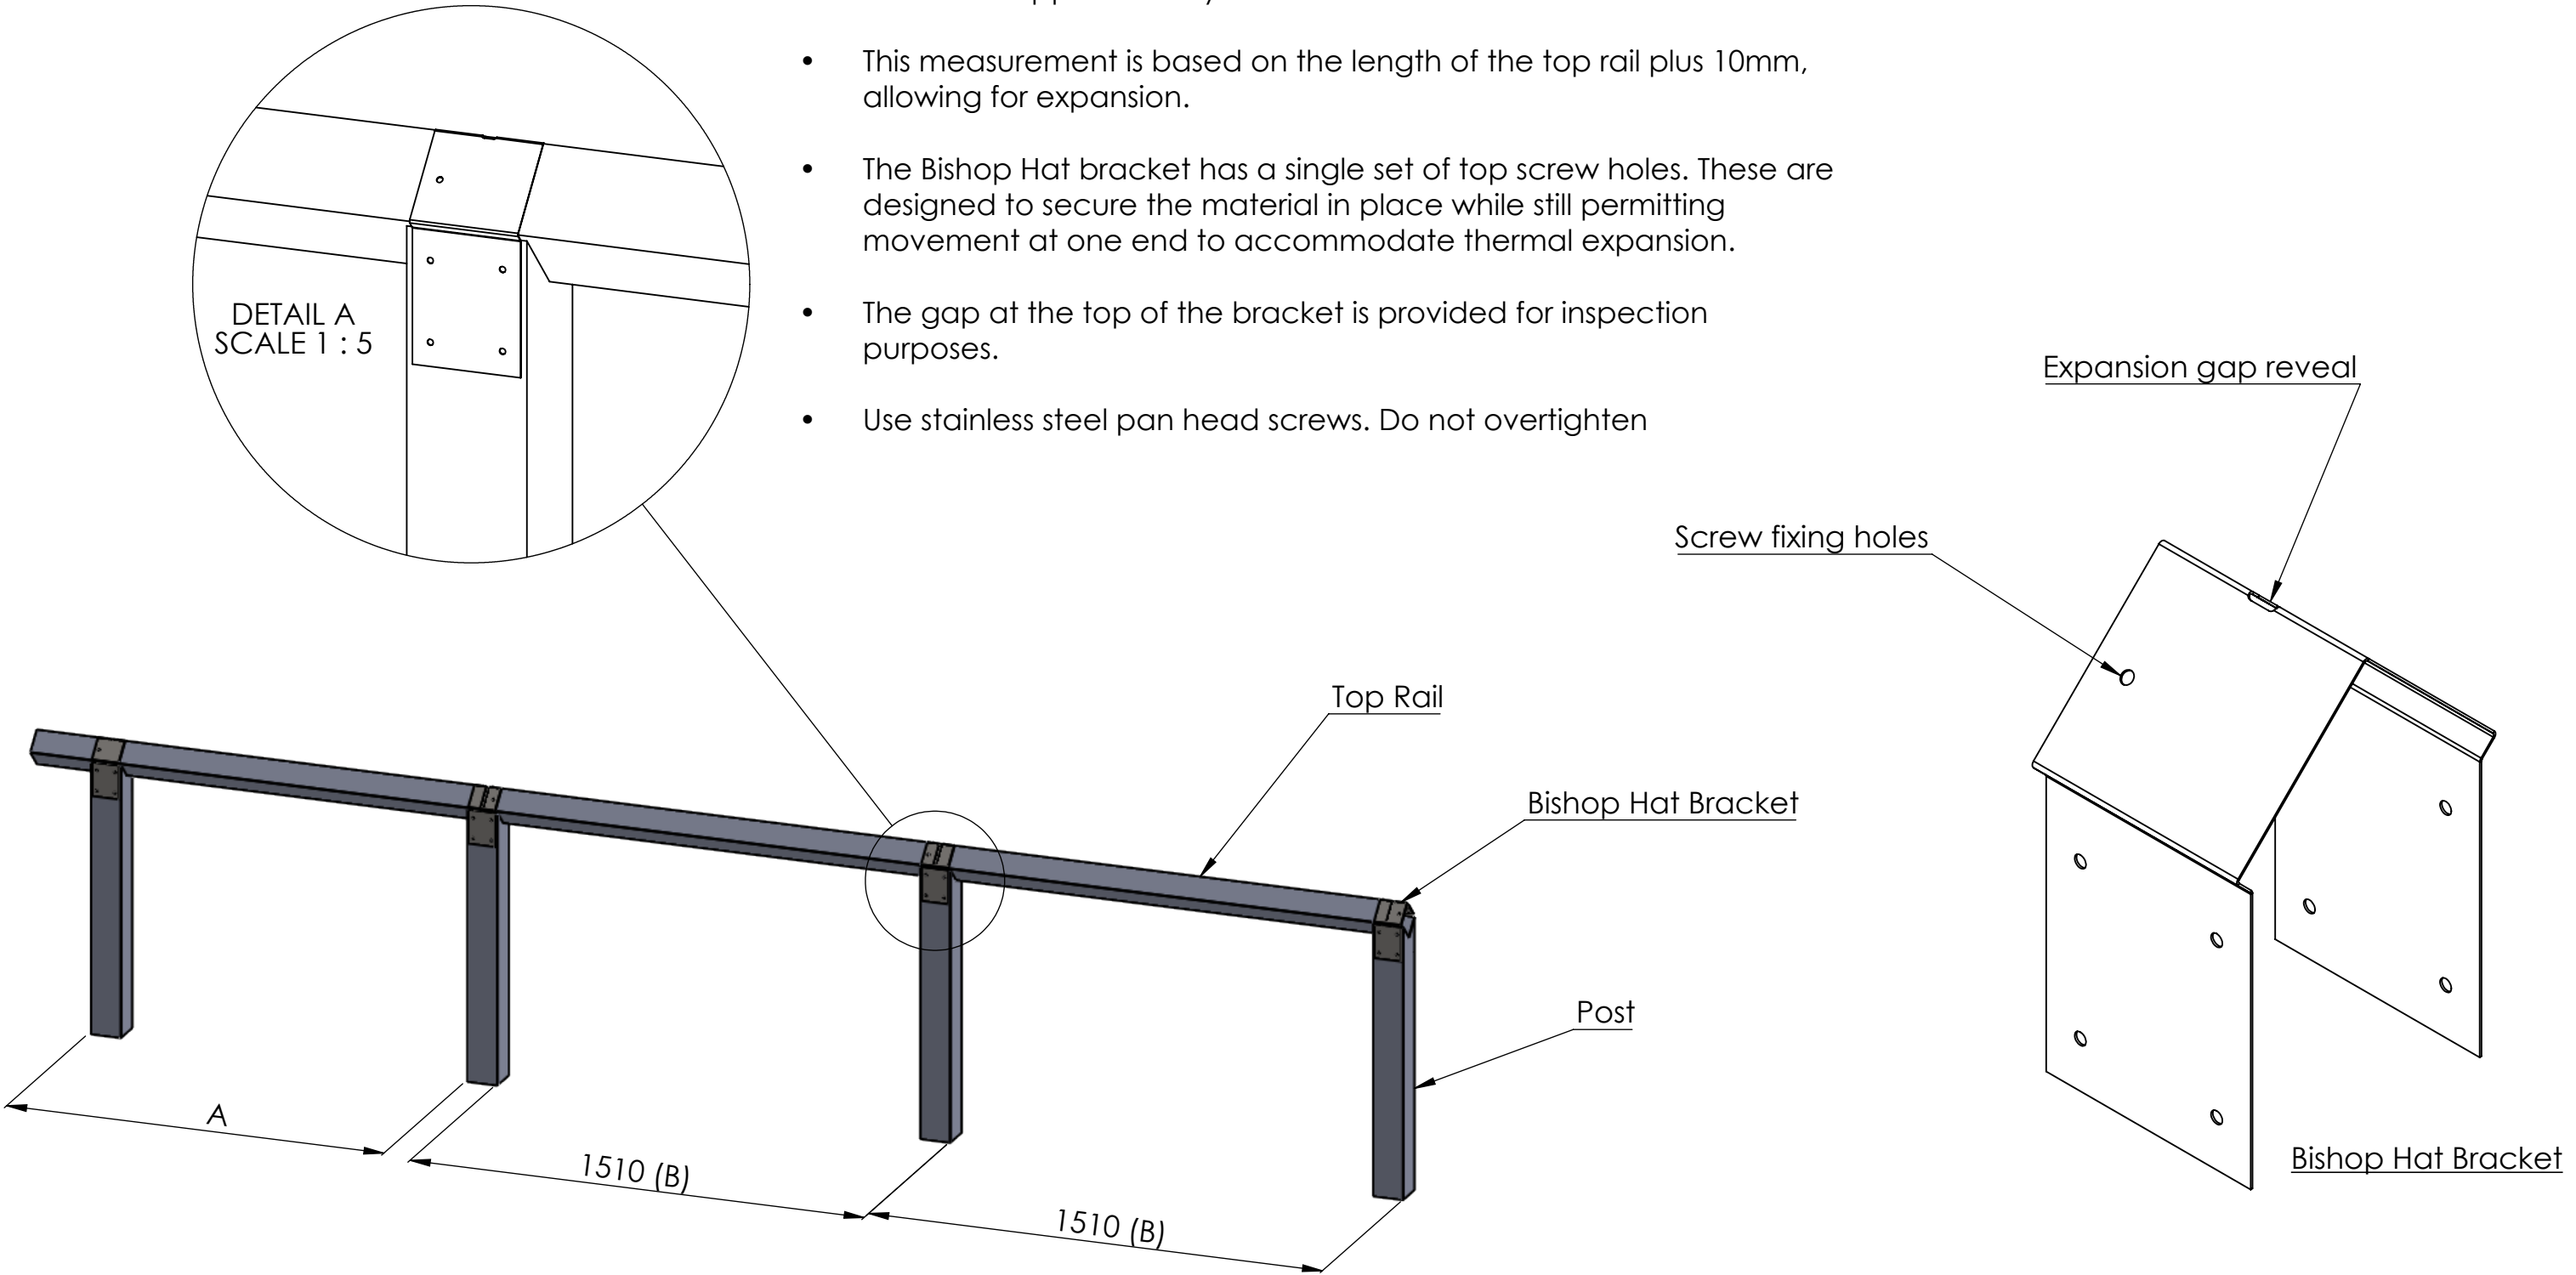

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF EARTH ANCHORS LIMITED. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF EARTH ANCHORS LIMITED IS PROHIBITED.				UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: RAW TOLERANCES: LINEAR: ANGULAR:		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		A3	
								Earth Anchors Ltd			
	NAME	SIGNATURE	DATE				TITLE:				
DRAWN	AC		13/10/25				Recycled Plastic Knee Fence				
MOD							Assembly Notes				
FINISH:				SW-DWG NAME:				DWG NO. EA2500828			
STOCK CODE:				SW-PART NAME:							
WEIGHT:				MATERIAL: Recycled Plastic				REVISION 1			
SCALE:						SHEET 1 OF 1					